

典型性能 Features

- ◆ 6 瓦功率输出 (6 Watts of Output Power)
- ◆ 超宽电压输入 (4: 1 Wide Range Input)
- ◆ 长期短路保护, 自恢复 (Short Circuit Protection ,Automatic Recovery)
- ◆ 小型化封装 (Small Package)



电气特性 Electrical Specifications

输入特性 Input	Min	Type	Max	Notes
输入电压范围 Input Voltage Range	4.5V	9V/12V	15V	
	9V	12V/24V	36V	
	18V	24V/48V	72V	
	40V	74V/110V	160V	
启动延时时间 Start-up Delay Time		100mS		
输出特性 Output	Min	Type	Max	Notes
输出电压精度 Set point Accuracy			±1%	一路
			±3%	二路
负载效应 Load Regulation			±0.5%	一路
源效应 Line Regulation			±0.2%	一路
动态响应 Dynamic Response			4% Vo Pk deviation 400 μS settling time	50~75% load 50~25% load
温度系数 Temperature Regulation		±0.2%/°C		
输出过流保护 Current Limit Threshold	110%		160%	
短路保护 Short-Circuit Protection	长期短路自恢复 Continuous, Automatic Recovery			
综合特性 General	Min	Type	Max	Notes
隔离电压 Isolation Voltage	1500Vdc			Input to Output
开关频率 Switching Frequency		300KHz		
平均故障间隔时间 MTBF		2×10 ⁶ Hrs		Mil HDBK 217F Tc=25°C
工作壳温 Case Temperature	工业级	-40°C		+90°C
	AD、AG 级	-40°C		+95°C
	AHII 级	-55°C		+105°C


储存温度 Storage Temperature	-55℃		+125℃	
相对湿度 Relative Humidity	10%		90%	
管脚焊接温度 Pin Solder Temperature			250℃	Wave Solder <10S
手工焊接时间 Hand Soldering Time			5S	Iron Temperature 425℃
传导 Conducted Emission	GB9254/CISPR22/EN55022 Class B (推荐电路见图)			
静电放电 Electrostatic Discharge	GB17626/EN61000-4-2 Contact ±6KV air ±8KV perf. Criteria A			
浪涌抗扰度 Surge Immunity	GB17626/EN61000-4-5 ±2KV (推荐电路见图) perf. Criteria A			
脉冲群抗扰度 Electrical Fast Transient	GB17626/EN61000-4-4 ±2KV (推荐电路见图) perf. Criteria A			

型号 Models	输入电压范围 Input Voltage Range	输出电压 (Vdc) Output Voltage	输出电流 (A) Output current	纹波噪声(mv) Ripple and noise	典型效率 Efficiency	容性负载 (µF) Max.Capacitor Load
WD6-24S3V3	9-36V	3.3	1.5	50	80%	1000
WD6-24S5	9-36V	5.05	1.2	50	82%	1000
WD6-24S9	9-36V	9	0.67	100	83%	680
WD6-24S12	9-36V	12	0.5	100	83%	470
WD6-24S15	9-36V	15	0.4	100	83%	470
WD6-24S24	9-36V	24	0.25	100	84%	220
WD6-24S48	9-36V	48	0.13	200	82%	100
WD6-48S3V3	18-72V	3.3	1.5	50	81%	1000
WD6-48S5	18-72V	5.05	1.2	50	83%	1000
WD6-48S9	18-72V	9	0.67	100	84%	680
WD6-48S12	18-72V	12	0.5	100	84%	470
WD6-48S15	18-72V	15	0.4	100	85%	470
WD6-48S24	18-72V	24	0.25	100	85%	220
WD6-48S48	18-72V	48	0.13	200	82%	100
WD6-110S3V3	66-160V	3.3	1.5	50	80%	1000
WD6-110S5	66-160V	5.05	1.2	50	82%	1000

WD6-110S9	66-160V	9	0.67	100	83%	680
WD6-110S12	66-160V	12	0.5	100	84%	470
WD6-110S15	66-160V	15	0.4	100	84%	470
WD6-110S24	66-160V	24	0.25	100	85%	220
WD6-110S48	66-160V	48	0.13	200	82%	220
WD6-24D5	9-36V	±5.05	±0.6	50	80%	470
WD6-24D12	9-36V	±12	±0.25	100	82%	220
WD6-24D15	9-36V	±15	±0.2	100	82%	220
WD6-48D5	18-72V	±5.05	±0.6	50	82%	470
WD6-48D12	18-72V	±12	±0.25	100	84%	220
WD6-48D15	18-72V	±15	±0.2	100	84%	220
WD6-110D5	66-160V	±5.05	±0.6	50	80%	470
WD6-110D12	66-160V	±12	±0.25	100	83%	220
WD6-110D15	66-160V	±15	±0.2	100	83%	220


■说明：仅列出典型型号，其它型号，请确定功率，输入电压及输出电压，致电我公司。

电磁兼容应用（EMC）

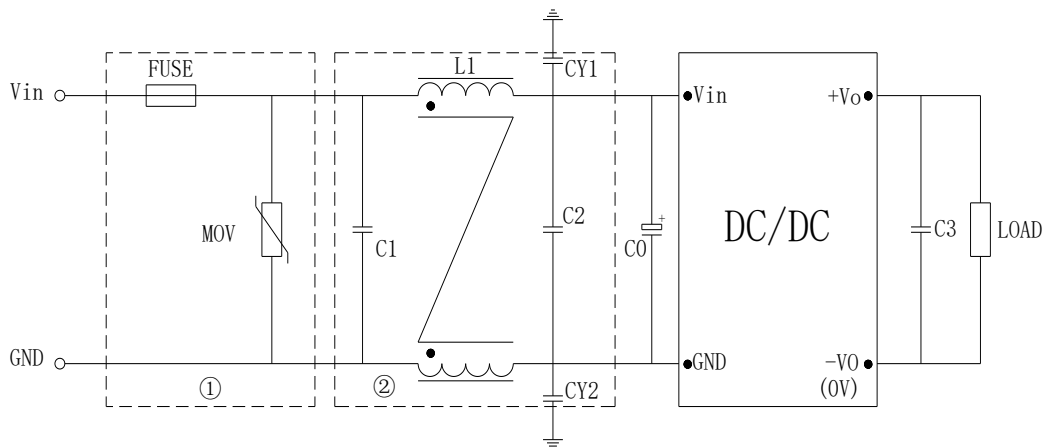

型号	Vin: 24V	Vin: 48V	Vin: 110V
FUSE	2A 慢熔	1A 慢熔	1A 慢熔
MOV	14D101K	14D101K	14D201K
C0	100 μ F/50V	47 μ F/100V	47 μ F/250V
C1、C2	4.7 μ F/50V	2.2 μ F/100V	1 μ F/250V
C3	100 μ F		
LCM	2mH		
CY1、CY2	4.7nF Y2 安规电容		

机械图及管脚说明 (Mechanical Chart、Pins) (Unit: mm/inch)

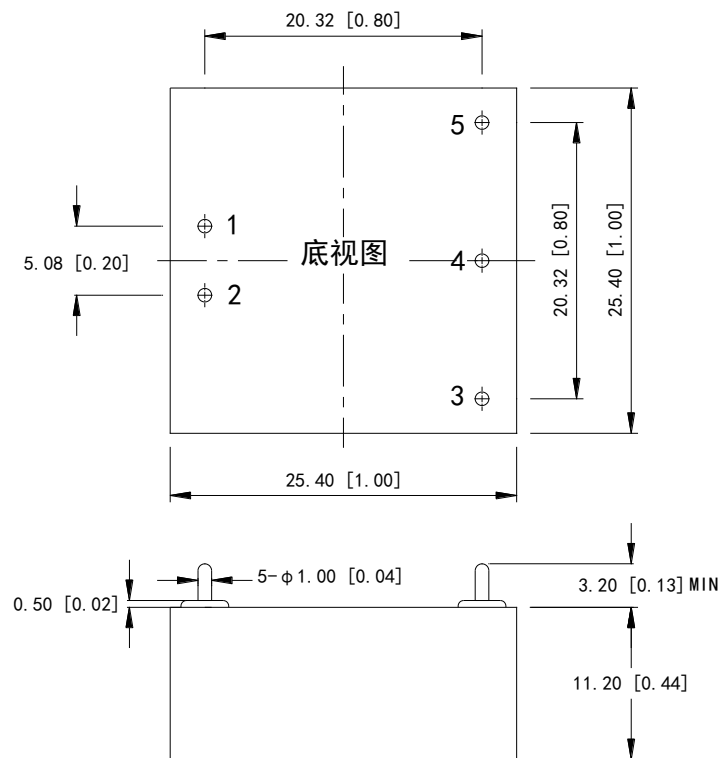

管脚 Pin	1	2	3	4	5
单路 Single	+Vin	-Vin	-Vo	NP	+Vo
双路 Dual	+Vin	-Vin	-Vo2	COM	+Vo1

注:安装定位尺寸公差按 GB/T1804-2000 F 级标准、外型尺寸公差按 GB/T1804-2000 C 级标准。